
CAPRI

*Stops at 0° and +/- 90°*
*Hydraulic soft close from 80 degrees*
*Adjustable zero position*


*Maximum door leaf 1000mm wide*
*Maximum door weight 80Kg*
Glass thickness 8mm, 10mm

Finishes:
Satin Stainless Steel, Polished Stainless Steel, Black
AISI 316 – suitable for humid and saline environments



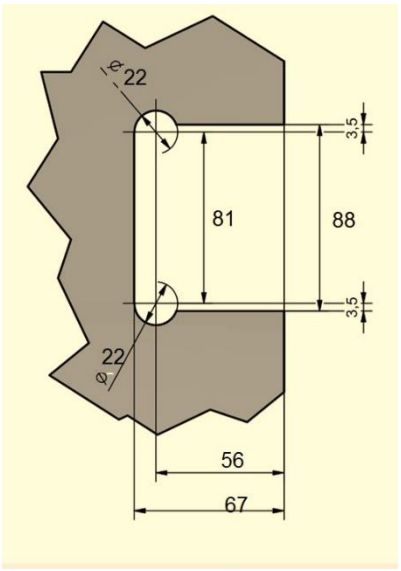



GLASS CUTOUT

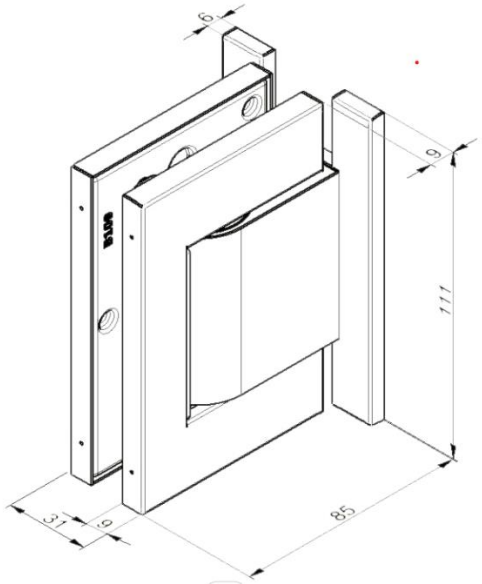



DIMENSIONS

**INSTRUCTIONS:**

IMPORTANT: for the correct functioning of the door, the hinges must be in perfect alignment.

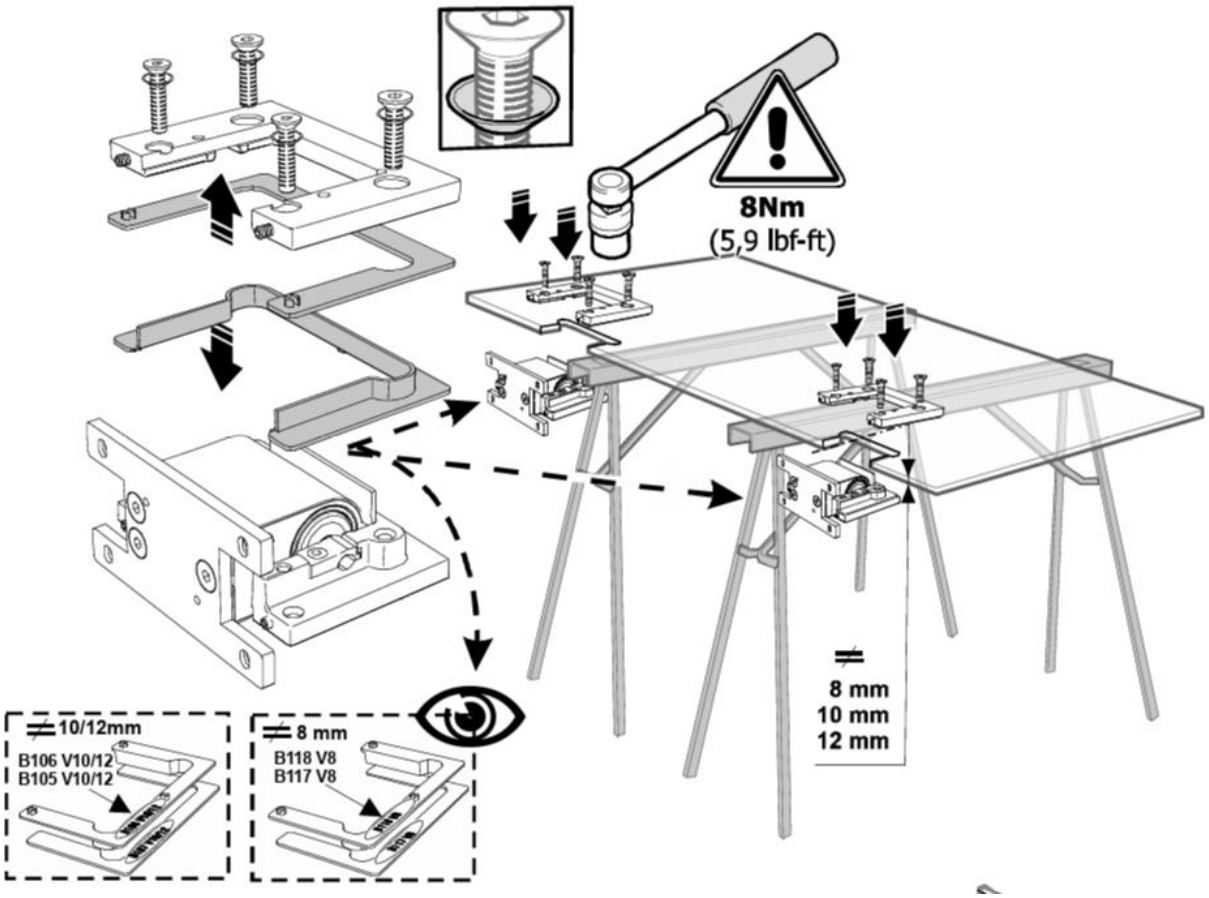


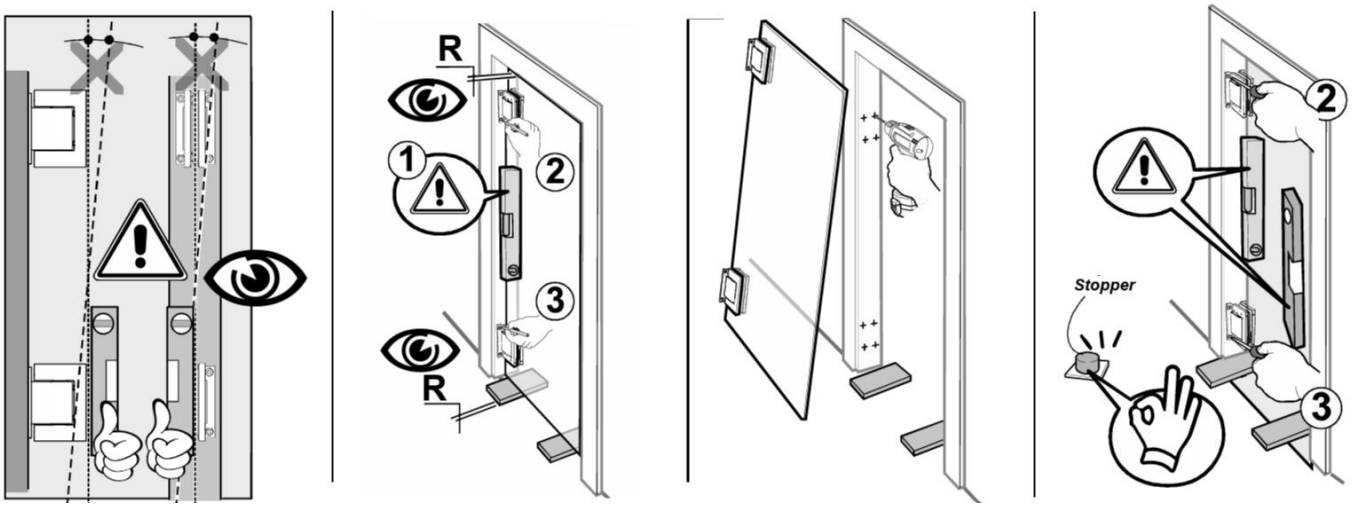




1. Ensure level.

2. & 3. Mark for hinge fixings top and bottom

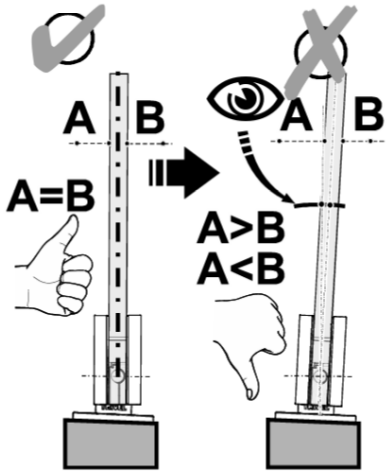
## ALIGNMENT

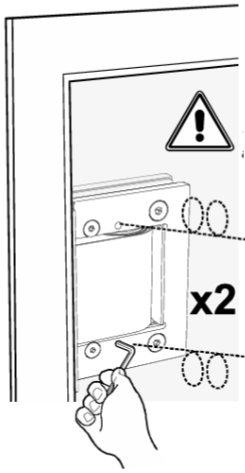



the alignment screws are not tightened

loosen 1 turn

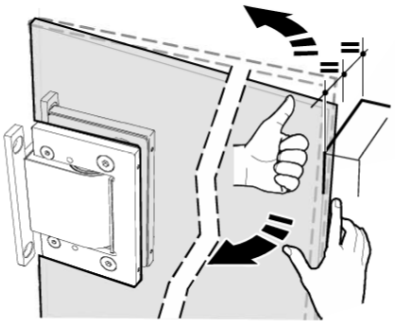


move door to the correct position

tighten alignment screws 2,5 Nm
DO NOT OVERTIGHTEN

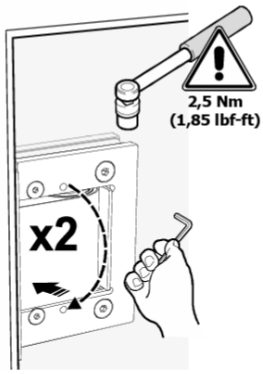


turn the screw for closing speed change

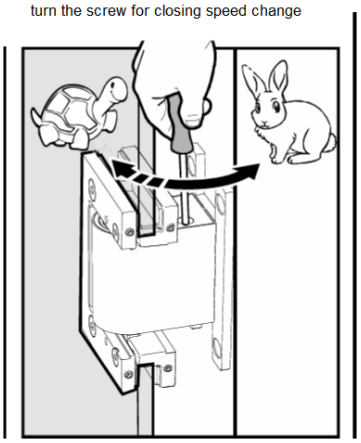

apply the covers a, b, c, d

